

Grounding
Systems



Grounding Bar

L-16



Ideal solution for shunts or multiple connections to different equipment in the installation of an earthing network.

Installation of Proinex Equipotential Bar L-16

**NO MAINTENANCE
REQUIRED**

10-Year warranty

“

Built in a single piece of stainless steel, cut and punched by laser, and then folded by CNC.




INSTALLATION

To install the Proinex Equipotential Bar L-16 the mounting holes must be planed and fixed using the most appropriate means to the surface to which they will be attached (wall, metal structure, reinforced concrete, etc.).

Once the equipotential bonding bar is installed, the different elements that make up the grounding network, javelins, metal structures, equipment, etc. can be connected.

Technical specifications

- Length: 10.2 in (260 mm)
- Width: 1.5 in (38 mm)
- Height: 1.2 in (30 mm)
- Number of connections: 16
- Bolts: M6 x 10 Stainless Steel
- Mounting: By means of 2 holes

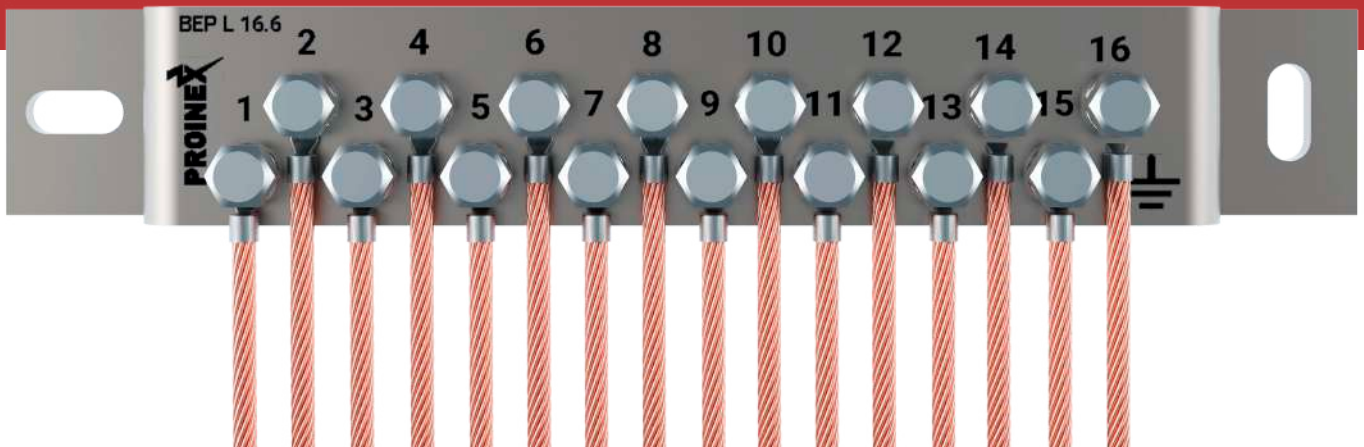

Grounding Bar

L-16



CALL US NOW!



+1 (832) 998-8404

info@proinexlightningprotection.com