

Grounding
Systems



Grounding Clamp

PAT-7



Designed to facilitate the grounding of metal masses.

“

The Grounding
Clamp PAT 7
is entirely made of
304L stainless steel.

It is equipped with a
hydrocarbon-resistant
retractable spiral cable
that offers excellent
mechanical resistance
and easy retraction, thus
preventing it from being
exposed to accidental
deterioration by
remaining on the ground
in the work area.




**NO MAINTENANCE
REQUIRED**

**ENTIRELY MADE OF
304L STAINLESS STEEL**

1-Year Warranty

Parts of Grounding Clamp PAT-7

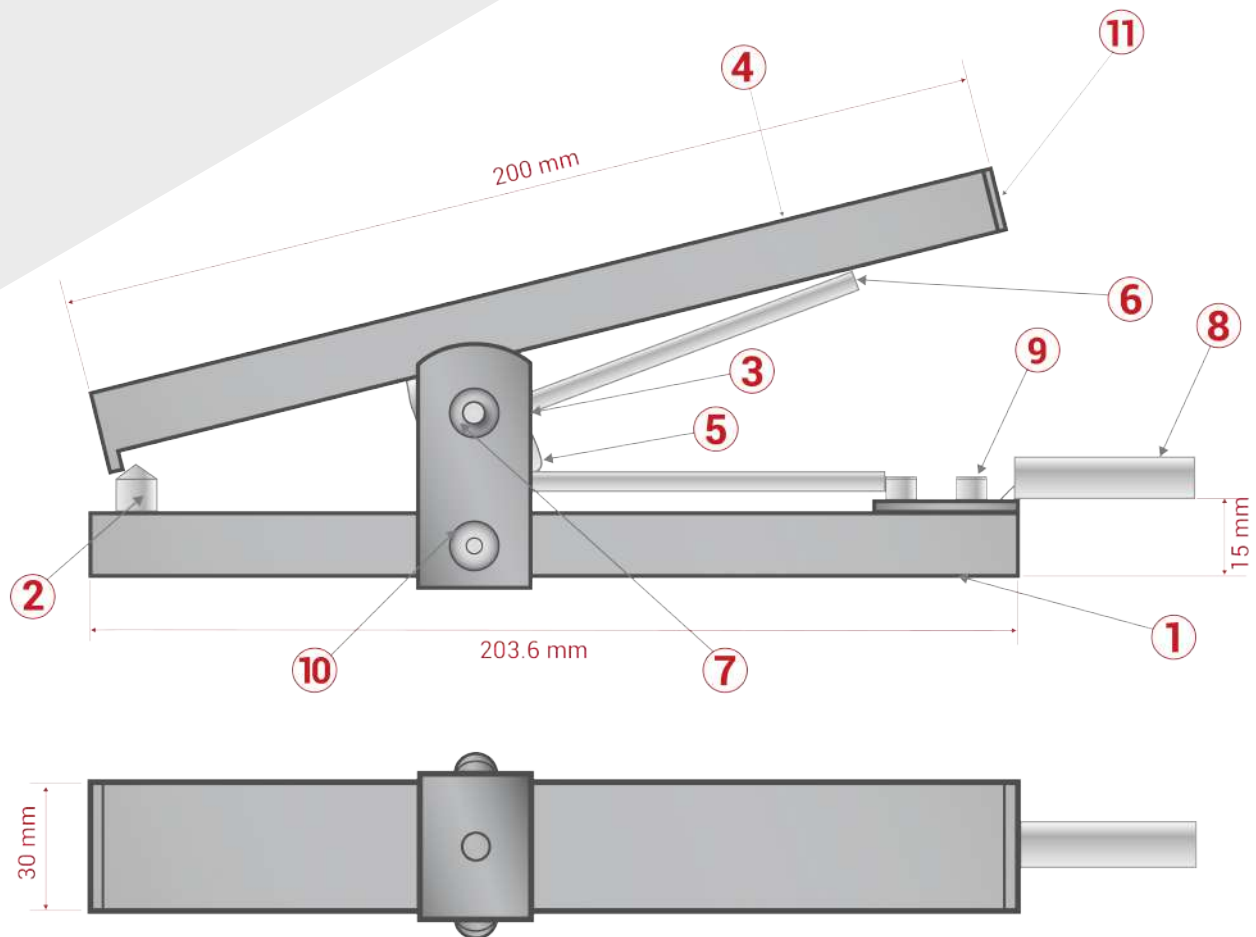

- | | | |
|------------------|---------------|------------------|
| 1 Lower Handle | 5 Upper Hinge | 5 TA-CC-M5 |
| 2 Hexagonal Tips | 6 Spring | 6 Similar Rivet |
| 3 Lower Hinge | 7 TA-M5 | 7 Plastic Covers |
| 4 Upper Handle | 8 Terminal | |

Technical Specifications

- Dimensions: 200 x 35 x 80 (external measurements in mm.)
- Handle: Biodegradable lactic polyacid
- Maximum opening: 40 mm
- Hardened steel teeth: 320-350 HB
- Closing force: 4 kgf/cm²
- Weight: 0.84 kg
- Total cable length: 7m
- Maximum operating temperature: 60 °C
- Thermal conductivity: 0.038-cal / (cm.s.°C)
- Impedance: 0.770 Ω



Grounding Clamp

PAT-7



CALL US NOW!

 +1 (832) 998-8404

info@proinexlightningprotection.com